


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

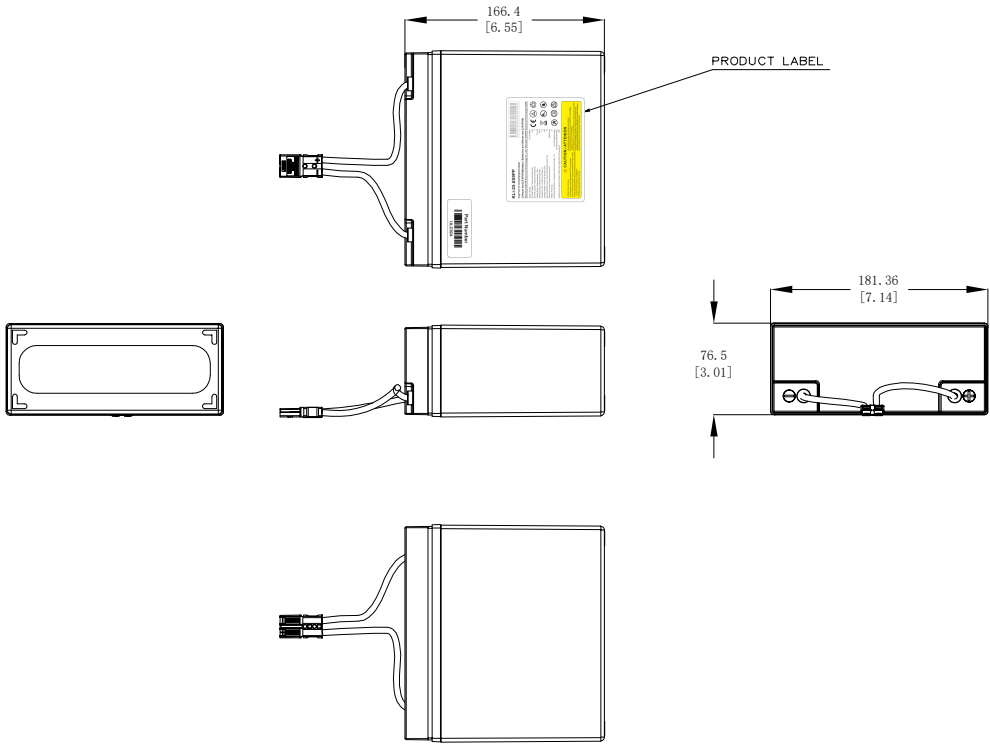


- 1. STANDARD:
 - USE WITH UPS CAPACITY: LFP LITHIUM REPLACEMENT BATTERY CARTRIDGE FOR 1KVA UPS ONLY
 - BATTERY TYPE: LFP LITHIUM ION BATTERY
 - NOMINAL INPUT/OUTPUT VOLTAGE: 24VDC
 - BREAKER TYPE: N/A
- 2. ADDITIONAL: NONE
- 3. ACCESSORY COMPONENTS: NONE

- NOTES:
- 1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSIONS ARE IN INCHES
 - 2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES.
 - 3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
 - 4. ALL PURCHASED ITEMS CONFORM TO C2-0834 PANDUIT SPECIFICATION FOR CHEMICAL SUBSTANCES TO BE CONTROLLED IN PRODUCT AND PACKAGING

IDENTIFICATION:

PART NUMBER	DESCRIPTION	SHIPPING WEIGHT (KG)
ULC024	24V LFP LITHIUM REPLACEMENT BATTERY CARTRIDGE FOR 1KVA NA UPS ONLY	2.9

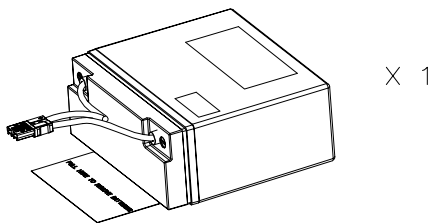

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	REV	DATE	BY	CHK	APR	DESCRIPTION	ECN																																														
01A	08/27/2022	D.L.	ZRZ	GLM/D.B	UPDATED DESCRIPTION	ULC024	<table border="1"> <tr> <td>REV</td> <td>DATE</td> <td>BY</td> <td>CHK</td> <td>APR</td> <td>DESCRIPTION</td> <td>ECN</td> </tr> <tr> <td>00A</td> <td>03/10/2022</td> <td>D.L.</td> <td>ZRZ</td> <td>GLM/D.B</td> <td>RELEASE TO PRODUCTION</td> <td>ULC024</td> </tr> <tr> <td>01A</td> <td>03/10/2022</td> <td>D.L.</td> <td>ZRZ</td> <td>GLM/D.B</td> <td>RELEASE TO PRODUCTION</td> <td>ULC024</td> </tr> <tr> <td>REV</td> <td>DATE</td> <td>BY</td> <td>CHK</td> <td>APR</td> <td>DESCRIPTION</td> <td>ECN</td> <td>REV</td> <td>DATE</td> <td>BY</td> <td>CHK</td> <td>APR</td> <td>DESCRIPTION</td> <td>ECN</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </table>				REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	00A	03/10/2022	D.L.	ZRZ	GLM/D.B	RELEASE TO PRODUCTION	ULC024	01A	03/10/2022	D.L.	ZRZ	GLM/D.B	RELEASE TO PRODUCTION	ULC024	REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	REV	DATE	BY	CHK	APR	DESCRIPTION	ECN														
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN																																																					
00A	03/10/2022	D.L.	ZRZ	GLM/D.B	RELEASE TO PRODUCTION	ULC024																																																					
01A	03/10/2022	D.L.	ZRZ	GLM/D.B	RELEASE TO PRODUCTION	ULC024																																																					
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	REV	DATE	BY	CHK	APR	DESCRIPTION	ECN																																														
00A	03/10/2022	D.L.	ZRZ	GLM/D.B	RELEASE TO PRODUCTION	ULC024																																																					
01A	03/10/2022	D.L.	ZRZ	GLM/D.B	RELEASE TO PRODUCTION	ULC024																																																					
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	REV	DATE	BY	CHK	APR	DESCRIPTION	ECN																																														

SMARTZONE UPS LI BATTERY CARTRIDGE ULC024	
CUSTOMER DRAWING	
LULC024/01	
LULC024-DC/01A	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE MM (IN)	
N/A	
THIRD ANGLE PROJECTION	ULC024-DC
03/10/2022	M.D VARIOUS
SHT 1 OF 2	2

KLi-25.6S9PP



IFPp18177/167/3P8S/H/0+50/90

Lithium Ion(LiFePO4)Battery / Batteries au lithium-ion (LiFePO4)

Shenzhen KSTAR Science & Technology Co.,Ltd / Shenzhen KSTAR Science & Technologie SARL

Model / Modèle	KLi-25.6S9PP			
Nominal Voltage / Tension nominale (Vdc)	25.6			
Nominal Capacity / Capacité nominale (Ah)	9			
Voltage Range / Plage de tension (Vdc)	21.2-28			
Nominal Energy / Energie nominale (Wh)	230.4			
Charging Current / Courant de recharge (A)	4.8			
Charging Voltage / Tension de recharge (Vdc)	<28			
Max. Discharging Current / Courant de décharge maximal (A)	63			
Short circuit current / Courant de court-circuit	400A/0.6ms			
Weight / Poids (kg)	2.9			
Operating Temperature / Température de fonctionnement (°C)	0-47(Charge/Recharge)			
	-20-55(Discharge/Décharge)			
Dustproof and waterproof rating / Classe d'étanchéité d'eau et de poussière	IP51			

CAUTION / ATTENTION


- Risk of fire or burning
- Do not open, crush, heat above 70°C or incinerate
- Do not short circuit the leads / terminals with any metals
- Stop using the battery if abnormal heat, odor, deformation or abnormal condition is detected
- Caution-read instruction manual
- Évitez des risques d'incendie ou de brûlure
- Évitez d'ouvrir, de briser, de chauffer, le chauffage supérieur à 70°C ou l'incinération.
- Évitez le court-circuiter les bornes (+) et (-) avec tout métal lorsque le chauffage anormal, l'odeur, la déformation ou la situation anormale de la batterie est détectée, ou après l'utilisation
- Lisez attentivement le manuel d'utilisation

24V LFP LITHIUM REPLACEMENT BATTERY CARTRIDGE

Part Number



ULC024

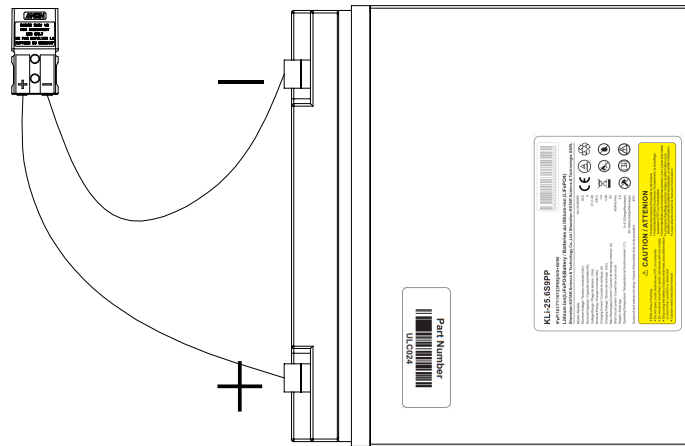

						FILE SMARTZONE UPS LI BATTERY CARTRIDGE ULC024 CUSTOMER DRAWING	
						REF NUMBER ULC024/01 DIMENSIONAL TOLERANCES ARE IN (IN)	
						UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE IN (IN)	
						N/A	
01A	08/25/2022	D.L.	ZR2	GLM/D.B	UPDATED DESCRIPTION	ULC024	PANDUIT ULC024-DC SHEET 1 OF 2
00A	03/10/2022	D.L.	ZR2	GLM/D.B	RELEASE TO PRODUCTION	ULC024	
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	
						DRAWN BY 03/10/2022 M.D.	
						THIS ANGLE PRODUCTION VARIOUS	