

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT
 18500 PANDUIT DRIVE, 60487, USA
 WWW.PANDUIT.COM




P/N: U10N32V

UNINTERRUPTIBLE POWER SYSTEMS

MODEL NUMBER: 1H3VIE
 INPUT (MAIN S&3): 380/400/415VAC | 50/60Hz | 46.6A MAX. | 3PH+N+PE
 INPUT (MAIN S&1): 380/400/415VAC | 50/60Hz | 79.2A MAX. | 3PH+N+PE
 INPUT (BYPASS&3): 380/400/415VAC | 50/60Hz | 45.7A MAX. | 3PH+N+PE
 INPUT (BYPASS&1): 220/230/240VAC | 50/60Hz | 79.2A MAX. | 1PH+N+PE
 BATTERY INPUT: $240V \text{ } \approx \text{ } 22.5A \text{ MAX}$




OUTPUT: 380/400/415VAC | 50/60Hz | 26.3A MAX. | 3PH+N+PE
 OUTPUT: 220/230/240VAC | 50/60Hz | 45.5A MAX. | 1PH+N+PE
 CAPACITY: 10 kVA / 10 kW
 Icc: 10 kA Protective Class: I
 PROHIBIDO SU USO EN EXTERIORES HECHO CHINA

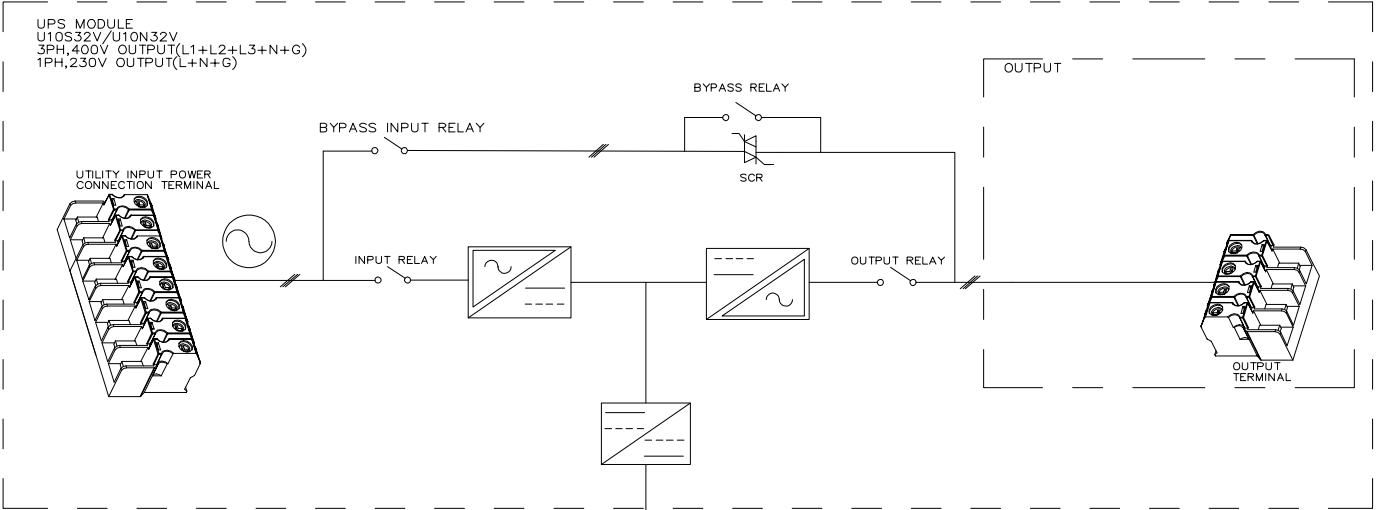

LEGEND

SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION
	CIRCUIT BREAKER		AC-DC CONVERTER
	RELAY		DC-AC CONVERTER
	AC-DC CONVERTER		BATTERY
	UTILITY CONNECTION		SCR
	OUTPUT CONNECTION		

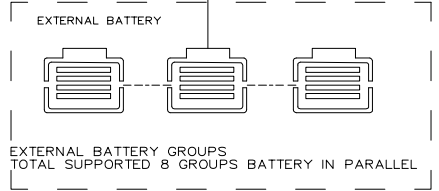


LCD-V018010000
 PFC-V008000000
 INV-V018010000
 MONITOR-V0180100000



DATE	BY	CHK	APR	DESCRIPTION	ECN	DATE	BY	CHK	APR	DESCRIPTION	ECN
01A 06/24/2021	HL	ZRZ	GLM/DJB	X-UPDATED DESCRIPTION S.ASSEED SHEET 3	U10N32V						
00A 12/24/2021	HL	ZRZ	SLM/DJB	RELEASE TO PRODUCTION	U10N32V						
REV DATE	BY	CHK	APR	DESCRIPTION	ECN						

FILE	SMARTZONE UPS U10S32V/U10N32V
DESCRIPTION	CUSTOMER DRAWING
REV	U10S32V/U10N32V/01
	U10S32V/U10N32V-DA/01A
DIMENSIONAL TOLERANCES ARE IN (mm)	N/A
DATE	12/30/2021
TIME	08:25:05
REV	
DATE	
TIME	


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

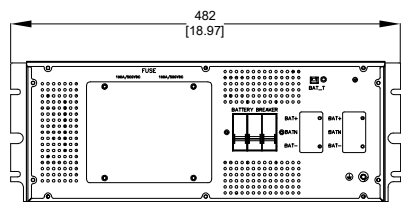


VIEW ROTATED 180°

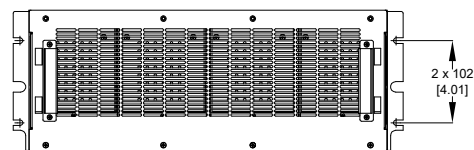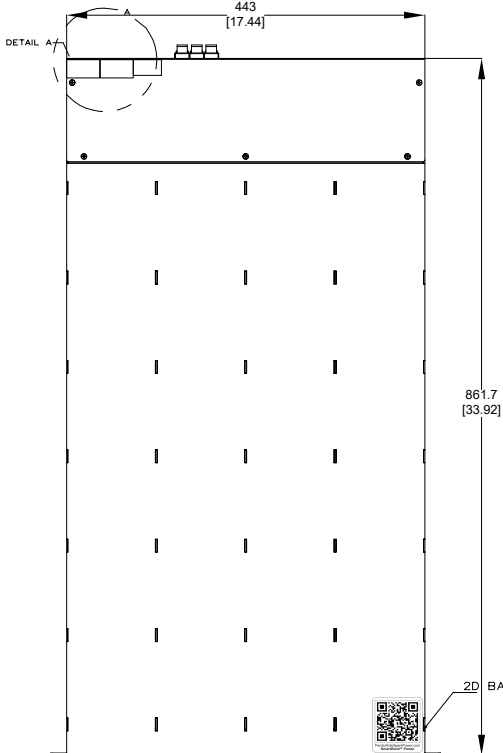

UVP480 REFERENCE IMAGE

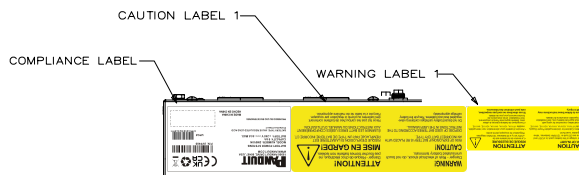

DETAIL A
SCALE 1: 2

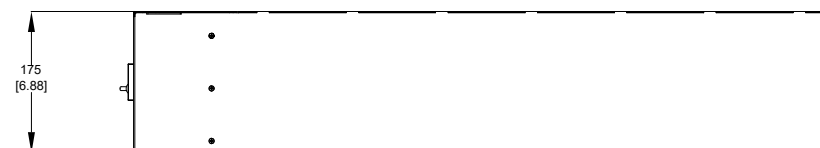

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DATE	BY	CHK	APR	DESCRIPTION	ECN
01A	08/04/2022	HL	ZHZ	GLM/D&B	A-UPDATED DESCRIPTION B-ADDED SHEET 3	U10N32V						
00A	12/30/2021	HL	ZHZ	GLM/D&B	RELEASE TO PRODUCTION	U10N32V						

PLEASE DO NOT UNLOAD FROM THE CUPB OR DISCONNECT THE CUPB FROM THE UPS UNIT UNTIL THE UPS UNIT IS IN THE OFF STATE AND THE UPS UNIT HAS COOLED TO 70°F (21°C) OR LOWER.	
PART NUMBER: U10S32V/U10N32V/01 CUSTOMER DRAWING: U10S32V/U10N32V-DA/01A DIMENSIONAL TOLERANCES ARE: UNLESS SPECIFIED OTHERWISE	PRICE: SMARTZONE UPS U10S32V/U10N32V N/A U10N32V-DC
THIRD ANGLE PROJECTION DATE: 12/30/2021 MJD VARIOUS	SHEET 3 OF 3