
Material	High Conductivity Seamless Copper Tube			
Plating	Electro-Tin		.4	
Wire Size	14 - 10 AWG STR, 12 - 10 AWG SOL			
Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric	1		
Wire Strip Length	7/16 in.			
Stud Size	3/8 in.	.56±.04	$\left(\begin{array}{c} \left(\begin{array}{c} \left(\begin{array}{c} \left(\begin{array}{c} \left(1\right) \\ \end{array}\right) \end{array}\right) \\ \left(\begin{array}{c} \left(\begin{array}{c} \left(1\right) \\ \end{array}\right) \end{array}\right) \\ \left(\begin{array}{c} \left(\begin{array}{c} \left(1\right) \\ \end{array}\right) \\ \left(\begin{array}{c} \left(1\right) \\ \end{array}\right) \end{array}\right) \\ \left(\begin{array}{c} \left(\begin{array}{c} \left(1\right) \\ \end{array}\right) \\ \left(\begin{array}{c} \left(1\right) \\ \end{array}\right) \\ \left(\begin{array}{c} \left(\begin{array}{c} \left(1\right) \\ \end{array}\right) \\ \left(\begin{array}{c} \left($	
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.		4	
UL Temperature Rating	90° C		.41±.02 D	
C.S.A Certified Wire Connector	Yes		1.38±.06	
Panduit Color Code on Barrel	N/A		1	
Panduit Die Index No. on Barrel	N/A	Wire inspection window—		
Alternate Industry Die Index No. () on Barrel	N/A			





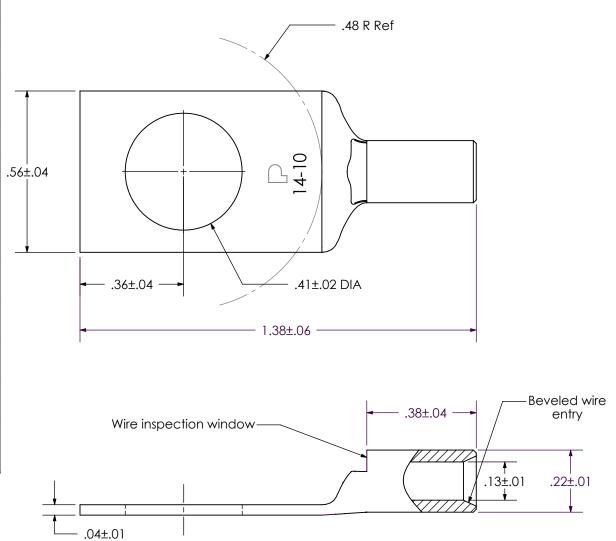

						CORP. TINLEY PARK, ILLINOIS
						LCA10-38-L
02	11/04	JHNU	JHNU	REVISED WIRE SIZE	12305	Copper Lug - One-Hole, Standard Barrel
REV	DATE	BY	СНК	DESCRIPTION	ECN	SCALE N/A DRAWING NO / CAD FILE LCA10-38-CUST