

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
P48G31M-XXYZ	SEE SHEET 2

**SPECIFICATION:**

- |                      |                               |
|----------------------|-------------------------------|
| 1. STANDARD:         | MONITORED&SWITCHED PER OUTLET |
| UNIT TYPE:           | VERTICAL, 0U                  |
| ORIENTATION:         | (24)C13/C15, (24)C13/C15/C19  |
| OUTLET QTY&TYPE:     | 200-240VAC                    |
| INPUT VOLTAGE:       | 30A(24A DERATED)              |
| INPUT CURRENT:       | (3)20AMP, DOUBLE-POLE,5KA     |
| BREAKER QTY&TYPE:    | THREE-PHASE,WYE               |
| INPUT PHASE:         | 8.6 KVA                       |
| RATED POWER:         | NEMA L21-30P,4P 5W,30A        |
| INPUT PLUG:          | SEE SHEET 2 PART NUMBER TABLE |
| INPUT POWER CORD:    | RoHS COMPLIANT                |
| REGULATORY STANDARD: |                               |

2. ADDITIONAL:

NONE

3. ACCESSORIES:

(1) QUICK-START GUIDE






**NOTES:**

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [ INCHES ] .
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES .
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART .
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL .
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION .
6. OUTLETS ARE WIRED LINE TO LINE(208V)

**IDENTIFICATION**

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: **P48G31M-XX Y Z**

XX: FINISHED GOOD COLOR BL=BLACK YL=YELLOW RD=RED BU=BLUE WH=WHITE GN=GREEN	Y: INPUT FEED TYPE 1=TOP-END FED 2=BOTTOM-END FED	Z: INPUT CORD LENGTH A=1 METER B=2 METER C=3 METER
--	---	---

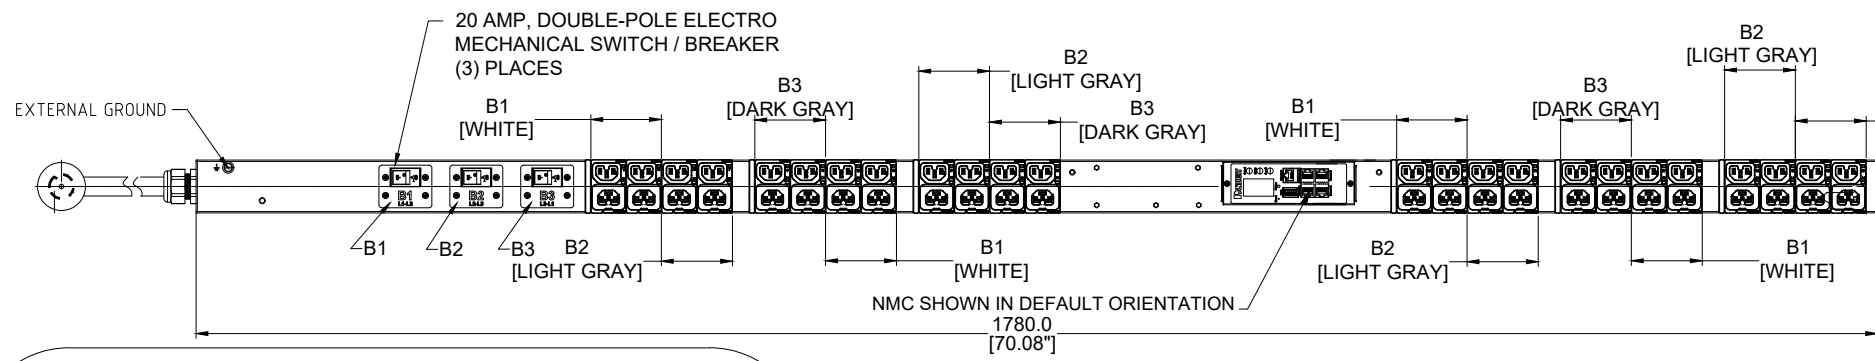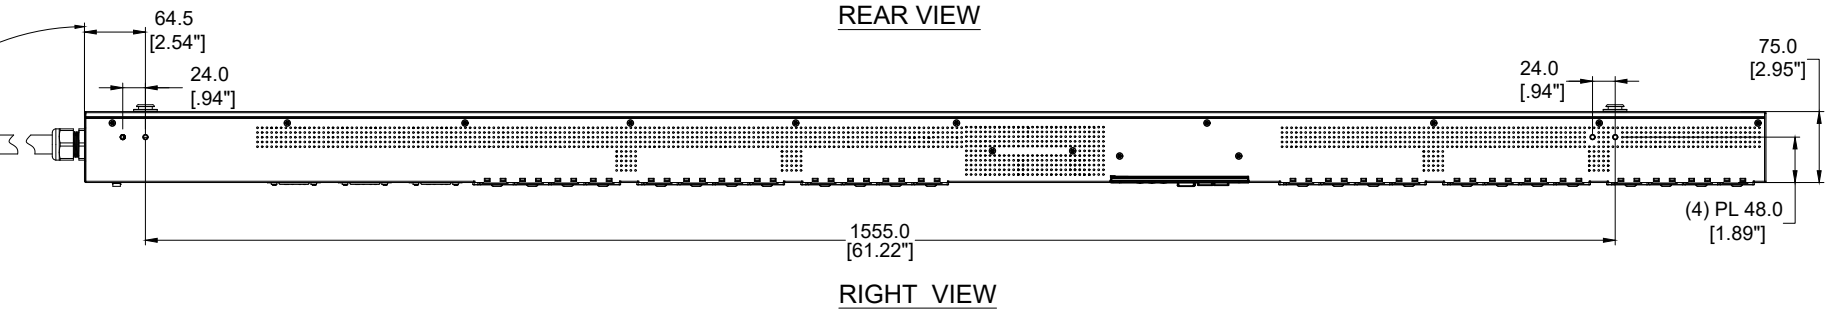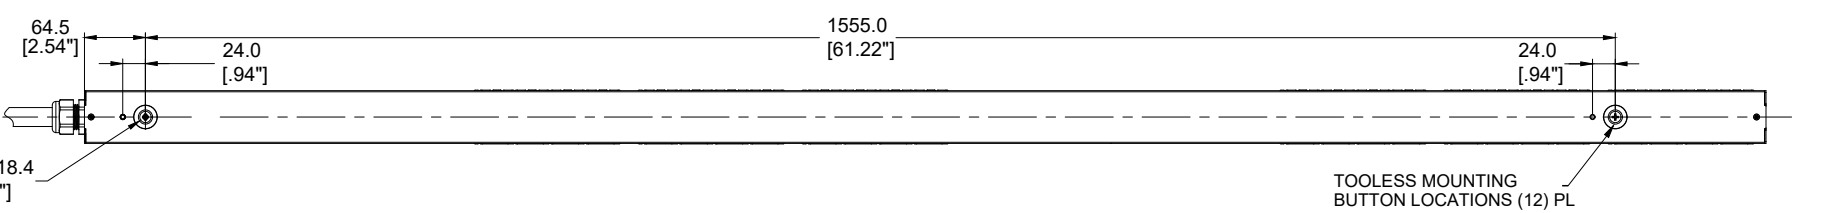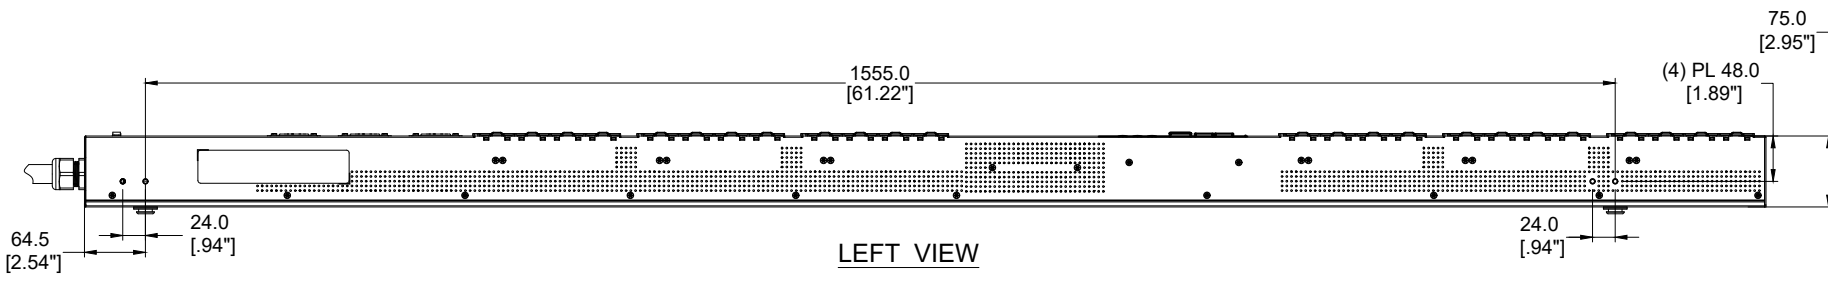

**BOTTOM VIEW**

**PLUG/RECEPTACLE BLOCK**

**PLUG**  
NEMA L21-30P, 4P 5W  
30A, 120/208V MAX RATED INPUT  
24A DERATED

**RECEPTACLES**  
C13/C15 COMBO  
10A, 250V MAX RATED OUTPUT

**RECEPTACLES**  
C13/C15/C19 COMBO  
16A, 250V MAX RATED OUTPUT

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
01A	12/20/2022	LRF	CSH	MJD	INITIAL RELEASE	P48G31M-XXYZ

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY.		SIGN
		DATE
		PRINT
TITLE <b>INTELLIGENT SERIES PDU</b> <b>P48G31M-XXYZ</b> CONTROL DRAWING		
ITEM REVISION NAME:		<b>PANDUIT</b>
DATASHEET FILE NAME:		
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR: N/A
THIRD ANGLE PROJECTION		DRAWING NUMBER: <b>P48G31M-XXYZ_DC</b>
DRAWN BY LRF	DATE 12/20/2022	SCALE NONE
CHK LJB	SCALE NONE	SHT 1 OF 2
		SCALE B

2


1

2

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P48G31M	VERTICAL,(24) C13/C15,(24)C13/15/C19,MONITORED&SWITCHED PER OUTLET ,200-240VAC/30A (24A DERATED) /3 PHASE, TOP-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254mm/-127mm) 10'[+10"/-5"]	6.8kg

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN												
		DATE												
		PRINT												
TITLE <b>INTELLIGENT SERIES PDU P48G31M-XXYZ</b> CONTROL DRAWING														
ITEM REVISION NAME:														
DATASHEET FILE NAME:														
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR:												
<table> <tr> <th>Tolerance(mm)</th> <th></th> </tr> <tr> <td>0-4&lt;50</td> <td>±0.5</td> </tr> <tr> <td>50-4&lt;250</td> <td>±1.0</td> </tr> <tr> <td>250-4&lt;500</td> <td>±1.5</td> </tr> <tr> <td>500-4&lt;1000</td> <td>±2.5</td> </tr> <tr> <td>1000-4&lt;2000</td> <td>±4.0</td> </tr> </table>		Tolerance(mm)		0-4<50	±0.5	50-4<250	±1.0	250-4<500	±1.5	500-4<1000	±2.5	1000-4<2000	±4.0	N/A
Tolerance(mm)														
0-4<50	±0.5													
50-4<250	±1.0													
250-4<500	±1.5													
500-4<1000	±2.5													
1000-4<2000	±4.0													
 THIRD ANGLE PROJECTION		DRAWING NUMBER: <b>P48G31M-XXYZ_DC</b>												
DRAWN BY LRF	DATE 12/20/2022	SCALE NONE												
CHK LJB	SHT 2 OF 2													
		SCALE B												

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
01A	12/20/2022	LRF	CSH	MJD	INITIAL RELEASE	P48G31M-XXYZ