PANDUIT P/N	WEIGHT
P12E20G	SEE SHEET 2

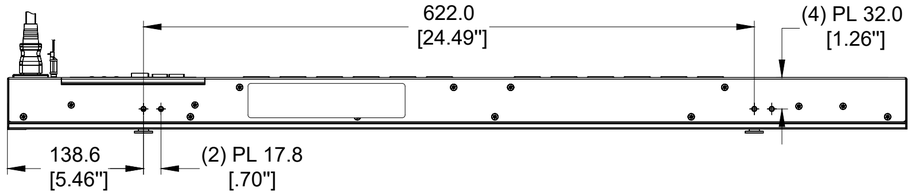

BOTTOM VIEW

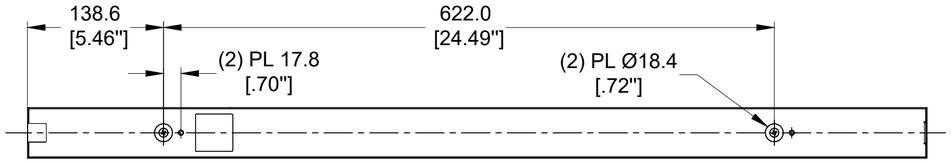

REAR VIEW

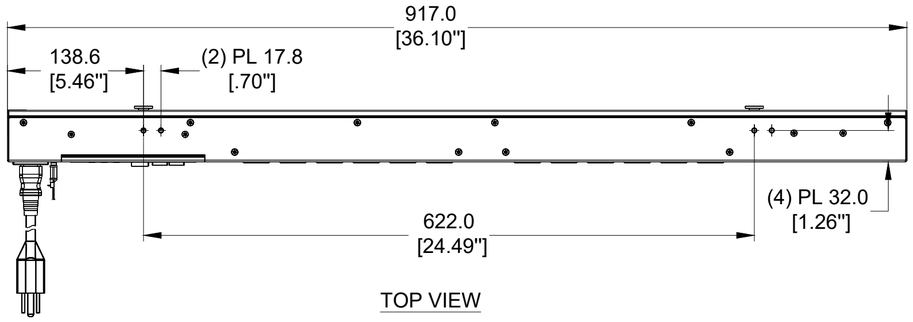

TOP VIEW

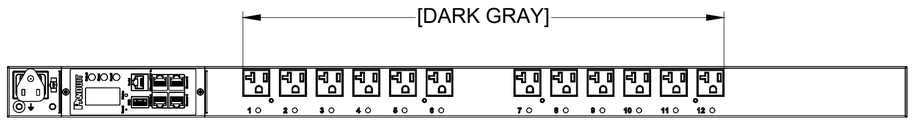

FRONT VIEW

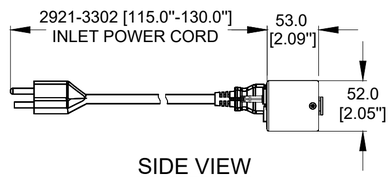

SIDE VIEW

SPECIFICATION:

1. STANDARD:

UNIT TYPE:	MONITORED SWITCHED
ORIENTATION:	VERTICAL, HALF
OUTLET QTY&TYPE:	(12) 5-20R
INPUT VOLTAGE:	100-120VAC
INPUT CURRENT:	15A (12A DERATED)
BREAKER QTY&TYPE:	N/A
INPUT PHASE:	SINGLE-PHASE
RATED POWER:	1.4kVA
INPUT PLUG:	NEMA 5-15P
INPUT POWER CORD:	3m [10'], FRONT FEED
REGULATORY STANDARD:	RoHS COMPLIANT

2. ADDITIONAL:
   THE G6 CONTROLLER IS NOT BACKWARDS COMPATIBLE WITH ANY LEGACY CONTROLLERS
3. ACCESSORIES:
   DOCUMENTATION KIT
   PRODUCT SAFETY WARNING SHEET

NOTES:

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN INCHES
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL

IDENTIFICATION

PART NUMBER	DESCRIPTION
P12E20G	G6 MS PDU, 15AMP, (12) 5-20R, NEMA 5-15P-3M, TOP FED,BLACK

PLUG
NEMA 5-15P
15A, 125V MAX RATED INPUT
12A DERATED

TWELVE (12)
RECEPTACLES
NEMA 5-20R
16A, 125V MAX RATED OUTPUT

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00A	10/10/2023	LWB	CSH	MJD	INITIAL RELEASE	P12E20G

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX.
THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY

SIGN
DATE
PRINT

TITLE
INTELLIGENT SERIES PDU
P12E20G
CUSTOMER DRAWING

ITEM REVISION NAME

DATASHEET FILE NAME:

UNLESS OTHERWISE SPECIFIED
DIMENSIONAL TOLERANCE ARE: mm [IN]

THIRD ANGLE PROJECTION

Tolerance(mm)	
0<L<50	±0.5
50<L<250	±1.0
250<L<500	±1.5
500<L<1000	±2.5
1000<L<2000	±4.0

MATERIAL/COLOR:
N/A

DRAWING NUMBER:
P12E20G_DC

DRAWN BY	DATE	CHK	SCALE
LWB	10/10/2023	SEAN	NONE

SHT 1 OF 2

SCALE B

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P12E20G	G6 MS PDU, 15AMP, (12)5-20R, NEMA 5-15P-3M, TOP FED, BLACK	BLACK (RAL 9005)	3M(+254MM/-127MM) 10'[+10"/-5"]	4.7kg

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00A	10/10/2023	LWB	CSH	MJD	INITIAL RELEASE	P12E20G

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX.
THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY

SIGN
DATE
PRINT

TITLE
INTELLIGENT SERIES PDU
P12E20G
CUSTOMER DRAWING

ITEM REVISION NAME

DATASHEET FILE NAME:

UNLESS OTHERWISE SPECIFIED
DIMENSIONAL TOLERANCE ARE: mm [IN]

THIRD ANGLE PROJECTION

Tolerance(mm)	
0<L<50	±0.5
50<L<250	±1.0
250<L<500	±1.5
500<L<1000	±2.5
1000<L<2000	±4.0

MATERIAL/COLOR:
N/A

DRAWING NUMBER:
P12E20G_DC

DRAWN BY	DATE	CHK	SCALE
LWB	10/10/2023	SEAN	NONE

SHT 2 OF 2

SCALE
B