

Base 8 MPO Breakout Harness Cable Assemblies

specifications

4-to-1 Breakout Cable Harness Assemblies are pre-terminated 8-fiber cable assemblies that allow for standards-compliant migration that convert a single lane of parallel optic signals (i.e. 40GBASE-SR4, 100GBASE-SR4, 200GBASE-SR4) into (4) discrete duplex LC channels. For example, a single MPO connector running 100GBASE-SR4 is broken out to 4 lanes of 25GBASE-SR on duplex LCs. All cable assemblies are factory terminated and tested to deliver verified optical performance and reliability for improved network integrity.



applications

Connect a single MPO-based port to four LC-based components, such as LAN or SAN switches, and servers. Supports 40G to 4x10G, 100G to 4x25G, 400G to 4x100G or 128G to 4x32G.

construction

Cable type:	Indoor
Cable jacket ratings:	Optical Fiber Nonconductive Plenum (OFNP) Low Smoke Zero Halogen (LSZH) Euroclass B2ca
Fiber types:	Singlemode: OS2 9/125µm Multimode: OM4 50/125µm OM5 50/125µm Signature Core™: OM4+ 50/125µm
Connector types; end 'A':	MPO/PanMPO™ Female MPO/PanMPO Male Note: Singlemode MPO connectors are angled polish
Connector types; end 'B':	LC Duplex, LC Uniboot Push Pull
Fiber count:	8
Jacket color:	OS2: Yellow OM4: Aqua OM4+: Aqua OM5: Lime

optical properties

Maximum cable attenuation:	Multimode: 3.0dB/km @ 850nm 1.0dB/km @ 1300nm Singlemode: 1.0dB/km @ 1310/1550nm
Maximum connector insertion loss:	Multimode: 0.35dB (Optimized MPO) 0.25dB (Ultra MPO) 0.15dB (Optimized LC) 0.10dB (Ultra LC) Singlemode: 0.75dB (Standard MPO) 0.35dB (Standard LC)
Minimum connector return loss:	Multimode: OM4: >26dB OM5: >26dB OM4+: >30dB Singlemode: OS2: >55dB

physical properties

Cable outside diameter (OD):	3.0mm
Minimum bend radius:	Under load: 20 x cable OD Static: 10 x cable OD
Cable tensile strength:	220N
Cable compressive load:	35N/cm
Cable flex:	25 cycles
Cable twist:	10 cycles
Connector durability:	500 mating cycles

environmental properties

Storage and shipping temperature:	-40°C to 70°C -40°F to 158°F
Installation temperature:	0°C to 40°C 32°F to 104°F
Operating temperature:	0°C to 70°C 32°F to 158°F

standards

Meets or exceeds:	ISO/IEC 11801, TIA/EIA-568-C.3, TIA-604-5 (FOCIS-5), TIA/EIA-568-C.1 RoHS Compliant
--------------------------	---

Base 8 MPO Breakout Harness Cable Assemblies

part number configurator

Example: FHZ8PJPV016F015 = OM4 Harness, 8-Fiber, round, plenum, Pan-MPO-8 female to LC Uniboot Push Pull with 24in (60cm) equal breakout, 4 to 1 Polarity (U2), Optimized IL - 15 Feet

Character	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
Example	F	H	Z	8	P	J	P	V	0	1	6	F	0	1	5

1 – Fiber

F = Fiber

2 – Cable Type

H = Indoor, Round Harness

3 – Fiber Type

9 = OS2 Singlemode 9/125µm
 Z = OM4 50/125µm
 W = OM5 50/125µm
 S = OM4+ 50/125µm

4 – Fiber Count

8 = 8 fibers

5 – Jacket Type

P = Plenum (OFNP)
 L = LSZH
 B = LSZH Euroclass B2ca

6 – Connector Type (End A)

G = MPO-8 Female (MM)
 H = MPO-8 Male (MM)
 J = PanMPO-8 Female (MM)
 K = PanMPO-8 Male (MM)
 X = MPO-8 Female APC (SM)
 Y = MPO-8 Male APC (SM)
 V = PanMPO-8 Female APC (SM)
 W = PanMPO-8 Male APC (SM)

7 – Connector Type (End B)

L = LC Duplex
 P = LC Uniboot Push Pull
 B = LC/APC Duplex (SM)
 9 = LC/APC Uniboot Push Pull (SM)

8 – Construction/Performance

Q = 4 to 1 / U2 - Std. IL (SM)
 V = 4 to 1 / U2 - Opt. IL
 U = 4 to 1 / U2 - Ultra IL (MM)
 1 = 4 to 1 / U - Std. IL (SM)
 2 = 4 to 1 / U - Opt. IL
 3 = 4 to 1 / U - Ultra IL (MM)

9 – 11 – Serial

See Table Below

12 – Unit of Measure

F = Feet
 M = Meters


13, 14, 15 – Cable Assembly Length

1 – 300 Feet
 0.5 – 100 Meters

Serial	Breakout Length	Stagger	Serial	Breakout Length	Stagger
011	18" (45cm)	Equal Breakout	01B	30" (76cm)	Equal Breakout
012	18" (45cm)	LC Pair 1 Longest	01C	30" (76cm)	LC Pair 1 Longest
013	18" (45cm)	LC Pair 1 Shortest	01D	30" (76cm)	LC Pair 1 Shortest
014	18" (45cm)	LC Pair 1 and 2 Longest	01E	30" (76cm)	LC Pair 1 and 2 Longest
015	18" (45cm)	Pair 1 and 2 Shortest	01F	30" (76cm)	Pair 1 and 2 Shortest
016	24" (60cm)	Equal Breakout	01M	39" (1m)	Equal Breakout
017	24" (60cm)	LC Pair 1 Longest	01N	39" (1m)	LC Pair 1 Longest
018	24" (60cm)	LC Pair 1 Shortest	01P	39" (1m)	LC Pair 1 Shortest
019	24" (60cm)	LC Pair 1 and 2 Longest	01Q	39" (1m)	LC Pair 1 and 2 Longest
01A	24" (60cm)	Pair 1 and 2 Shortest	01R	39" (1m)	Pair 1 and 2 Shortest

Base 8 MPO Breakout Harness Cable Assemblies

engineering drawing

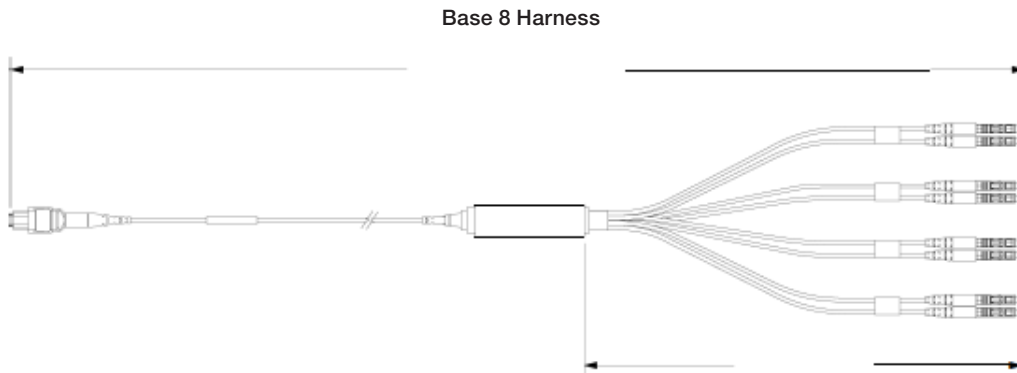

4 to 1 Breakout Harness Fiber													
Method U													
MPO* Fiber Position	1	2	3	4	5	6	7	8	9	10	11	12	
LC Pair	1-A	2-A	3-A	4-A	X	X	X	X	4-B	3-B	2-B	1-B	
Method U2 (Pair Flipped)													
MPO* Fiber Position	1	2	3	4	5	6	7	8	9	10	11	12	
LC Pair	1-B	2-B	3-B	4-B	X	X	X	X	4-A	3-A	2-A	1-A	

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Guadalajara, Mexico
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

PANDUIT[®]

For more information
Visit us at www.panduit.com
Contact Customer Service by email: cs@panduit.com
or by phone: 800.777.3300

© 2023 Panduit Corp.
ALL RIGHTS RESERVED.
FBSP242-WW-ENG
10/2023