

SmartZone™ G5 LED Light Strip Sensor

specifications

The automatic LED light strip sensor kit is designed to activate when the cabinet door is opened more than 10mm after a short period of time. In addition to allowing for better cabinet visibility, this provides added security by giving a lighted notification that the cabinet door is open.



SmartZone™ G5 LED Light Strip Sensor

Light strip, cable, and
door contact sensor: ACD01

technical information

Dimensions:	15 x 1 x 0.5 in. (382 x 25 x 12mm)
Mounting:	On board magnets or double-sided tape

*Mounting hardware included

key features and benefits

Door Access	Detects access to a rack, cabinet or room in a data center
RJ45 connection	Utilizes a RJ45 quick disconnect coupler to allow standard patch cable connection
Versatile mounting	Offers versatile mounting options to accommodate easy deployment inside a rack or within a room within a data center or facility building
Plugs directly to the iPDU	Simplifies installation as it self-identifies to the G5 iPDU firmware

applications

The SmartZone™ G5 LED Light Strip Sensor effectively lights up the inside of a dark cabinet once it senses the door open greater than 10mm after a short period of time. This automatic rack light is designed for indoor mounting to a rack or cabinet. The Automatic Rack Light **MUST** be installed with the Door Switch Sensor (included). The magnetic door sensor portion of the solution can be mounted

on the inside of the cabinet. Complete the installation by connecting the USB plug from the rack light to the USB port on the iPDU controller. The USB plug from the rack light contains an additional USB port (pig-tail), which can be used for uploads, downloads, and additional USB functions, while the light kit is installed.

SmartZone™ G5 LED Light Strip Sensor

technical specification

Electrical	
Operational Voltage	5V DC
Light Output (0.5m), Spherical radiation pattern	111 lumens
Physical	
Length of cable	1.5m (from USB port to LED Rack Light)
Environmental	
Maximum elevation, above MSL (Operating/Storage)	0-10000 feet (0-3048m)/0-50000 feet (0-15240m)
Temperature (Operating/Storage)	0°C~ + 70°C (32~ 158°F)/-20~ + 70°C (-4 ~ 158°F)
Humidity (Operating/Storage)	0-95% RH, non-condensing
Compliance	
Environmental Verification	ROHS, WEEE

Package Includes

Rack Light Kit

Automatic Rack Light



Cable for LED Light Strip




3M Double-sided Tape




Door Switch Kit

Door Contact Sensor Assembly

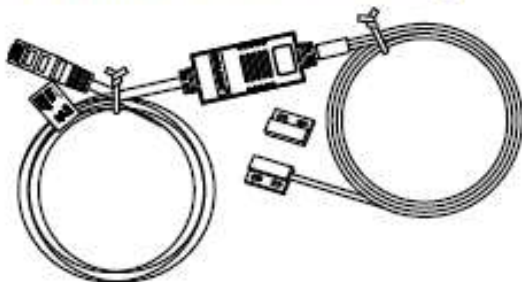

RJ45 Quick Disconnect Coupler Sold Separately

Panduit
Part Number:
CC5E88BL



Tap Screw

(quantity: 4)



Standard Ethernet Extension Cable

Sold Separately

2.0m length

Panduit


Part Number:

UTP28CH2MBL



Double-sided Tape

(quantity: 2)



Cable Ties

(quantity: 5)



Note: The USB light strip is only designed to connect to a G5 iPDU. Connecting it to another device may result in damage.

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Guadalajara, Mexico
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

For more information

Visit us at www.panduit.com

Contact Customer Service by email: cs@panduit.com

or by phone: 800.777.3300

PANDUIT®

© 2020 Panduit Corp.
ALL RIGHTS RESERVED.
PUSP70--WW-ENG
8/2020