

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
SEE SHEET 2	SEE SHEET 2

SPECIFICATION:

- | | |
|----------------------|-----------------------------------|
| 1. STANDARD: | MONITORED & SWITCHED PER OUTLET |
| UNIT TYPE: | VERTICAL, 0U FULL |
| ORIENTATION: | (21)C13/C15, (21)C13/C15/C19 |
| OUTLET QTY & TYPE: | 200-240VAC |
| INPUT VOLTAGE: | 60A(48A DERATED) |
| INPUT CURRENT: | (6) 20AMP, DOUBLE-POLE |
| BREAKER QTY & TYPE: | THREE-PHASE, DELTA |
| INPUT PHASE: | 17.3 kVA |
| RATED POWER: | IEC 60309 3P+E (IP44) |
| INPUT PLUG: | SEE SHEET 2 FOR PART NUMBER TABLE |
| INPUT POWER CORD: | RoHS COMPLIANT |
| REGULATORY STANDARD: | |

2. ADDITIONAL:
THE G6 CONTROLLER IS NOT BACKWARDS COMPATIBLE WITH ANY LEGACY CONTROLLERS







3. ACCESSORIES:
DOCUMENTATION KIT
PRODUCT SAFETY WARNING SHEET

NOTES:

- PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES].
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES .
- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART .
- FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL .
- DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

IDENTIFICATION

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: **P42G20G-XX Y Z**

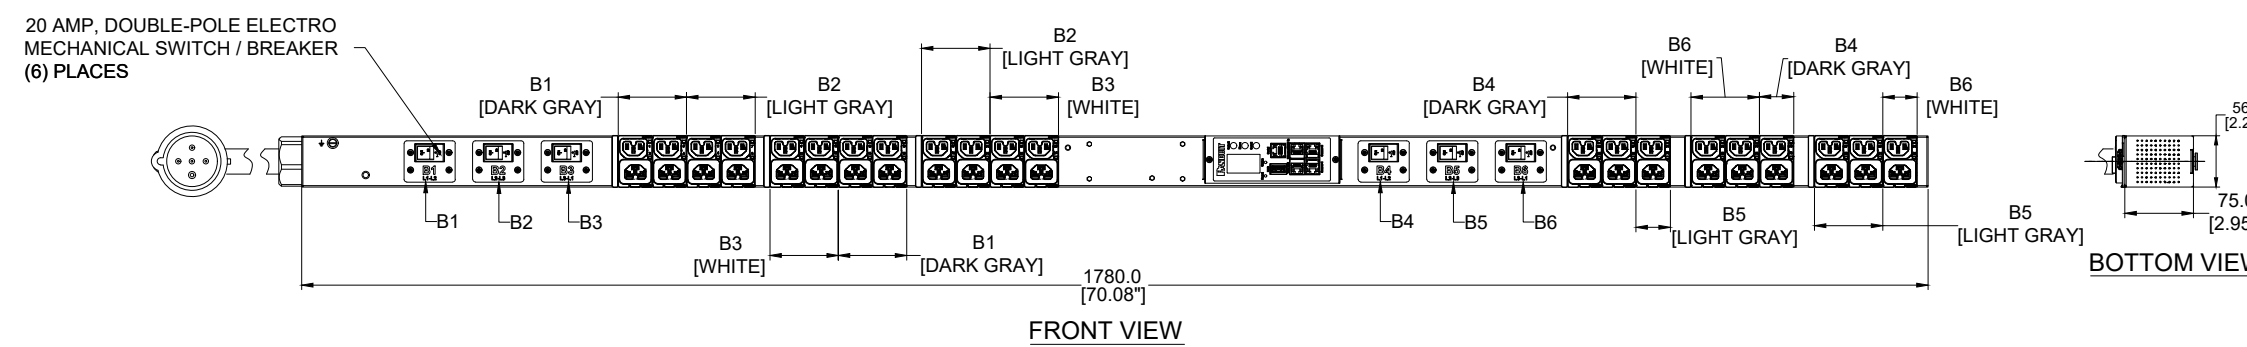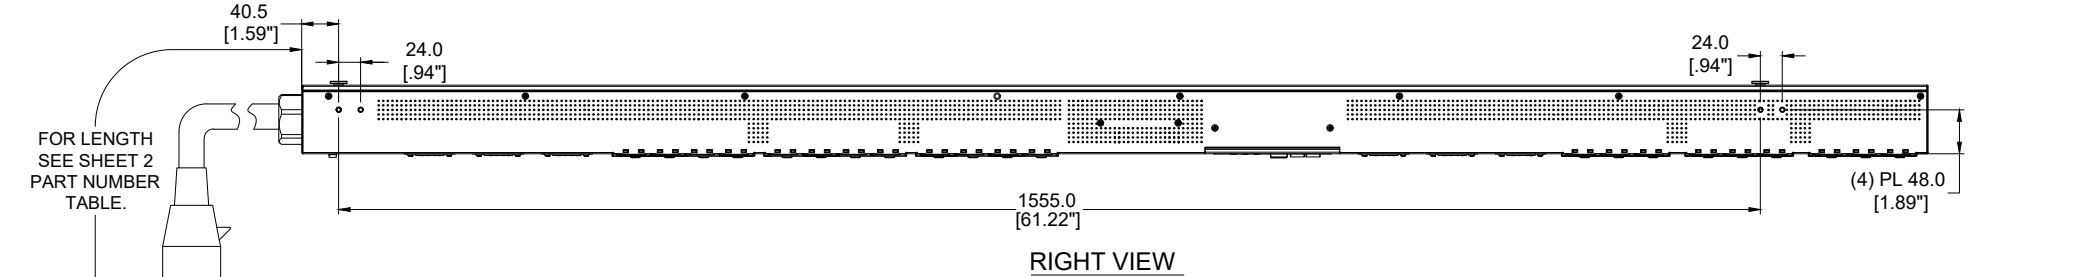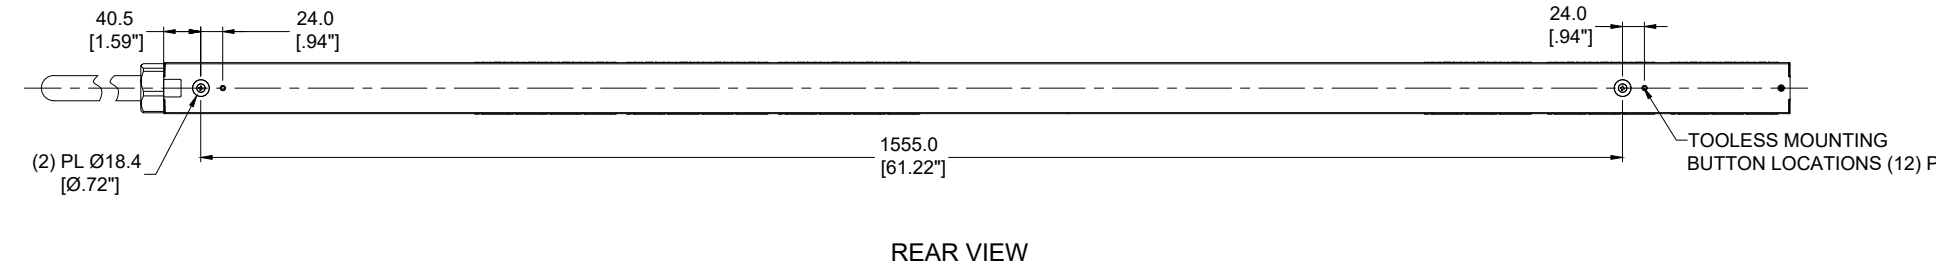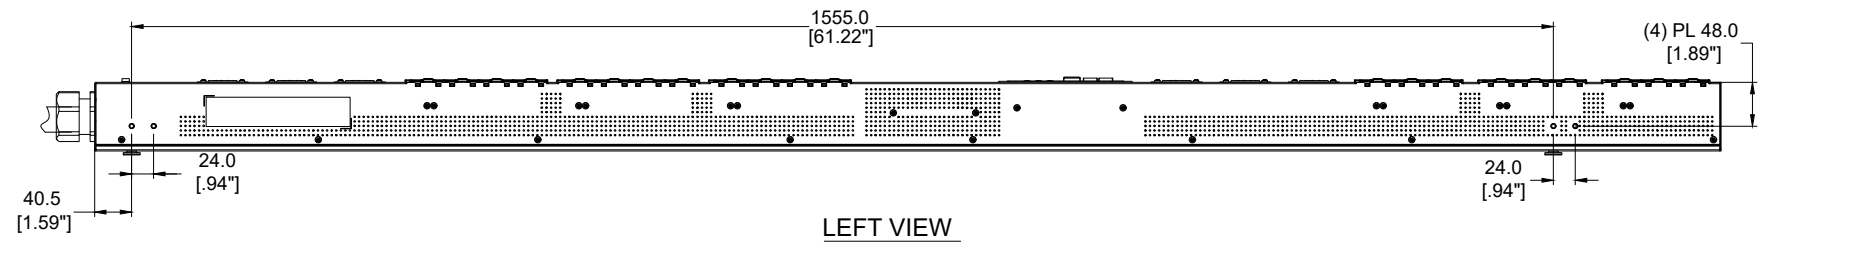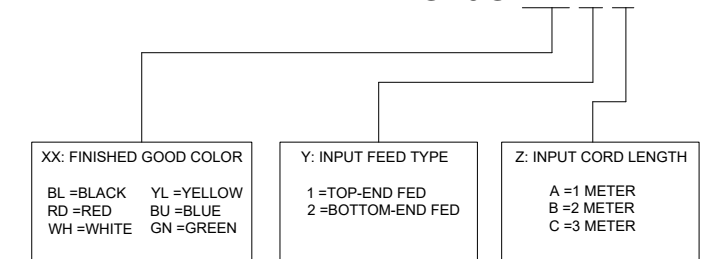

PLUG/RECEPTACLE BLOCK

PLUG
IEC 60309, 3P 4W, 9H
IP44 (SPLASHPROOF)
60A, 250V, 3-PHASE MAX RATED INPUT
48A DERATED

RECEPTACLES
C13/C15/C19 COMBO
16A, 250V MAX RATED OUTPUT

RECEPTACLES
C13/C15 COMBO
10A, 250V MAX RATED OUTPUT

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00A	11/03/2023	NW	CSH	MJD	INITIAL RELEASE	P42G20G-XXYZ

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY.		SIGN
		DATE
		PRINT
TITLE INTELLIGENT SERIES PDU P42G20G-XXYZ CUSTOMER DRAWING		
ITEM REVISION NAME		
DATASHEET FILE NAME:		
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR:
Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0		N/A
THIRD ANGLE PROJECTION		DRAWING NUMBER: P42G20G-XXYZ_DC
DRAWN BY NW	DATE 11/03/2023	SCALE NONE
SHT 1 OF 2		SCALE B



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P42G20G	G6 MSPO PDU, 60AMP, (21) C13/C15 (21) C13/C15/C19, IEC 60309 3P 4W 9H IP44-3M, TOP FED, BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10' [+10"/-5"]	11.5kg

B

B

A

A

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00A	11/03/2023	NW	CSH	MJD	INITIAL RELEASE	P42G20G-XXYZ

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN
		DATE
		PRINT
TITLE INTELLIGENT SERIES PDU P42G20G-XXYZ CUSTOMER DRAWING		
ITEM REVISION NAME		
DATASHEET FILE NAME:		
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR: N/A
Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0		DRAWING NUMBER: P42G20G-XXYZ_DC
THIRD ANGLE PROJECTION	DRAWN BY: NW DATE: 11/03/2023	CHK: CSH SCALE: NONE SHT 2 OF 2
		SCALE: B

